


Edge-Bonded Assemblies

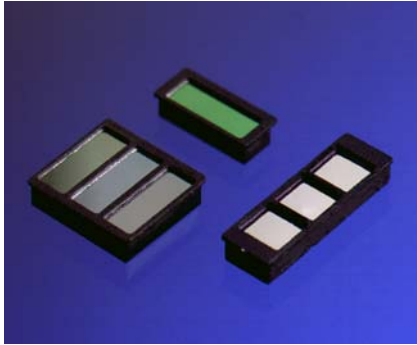

Key Features

- Multiple spectral bands in a common assembly
- Individual filter elements selected for optimum performance
- Miniaturized for size-constrained applications
- Space-qualified materials designed to meet harsh environments
- Customized to fit detector size
- Opaque bonding materials prevent cross-channel interference
- Avoids low, cumulative yields typical of monolithic, multi-channel filters

Applications

- Multi-channel focal plane arrays
- Staring arrays

Reliable Performance with Multiple Wavelength Selectivity

JDSU manufactures a wide range of optical assemblies, including:

- Prism assemblies
- Color wheels
- Fixed and linear variable filter assemblies


For applications that require multiple wavelength discrimination coupled with small detectors, edge-bonded assemblies are often the most cost-effective solution.

Edge-bonded assemblies typically have three to five separate filter elements cemented edge-to-edge to form a single substrate. With suitable mounting hardware, the edge-bonded assembly is typically mounted in close proximity to the detector. This eliminates the need for large filter elements near the entrance to the optics system.

Each filter element of the assembly is cut from an oversize, coated module, which results in a wide range of possible sizes and materials for the final assembly.

Edge-bonded assemblies are ideal for many applications where space, weight and survivability are the most important considerations.

We offer other products for spectroscopic applications. Our complete production facilities can support your optical filter requirements from prototypes through OEM volumes. We provide worldwide customer service and technical support.

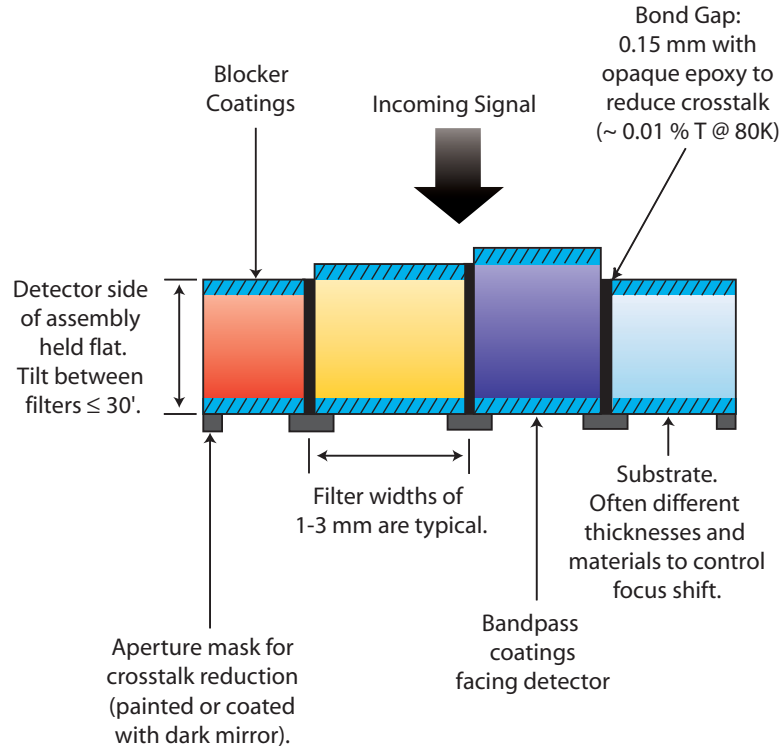Environmental Specifications

Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2006 JDS Uniphase Corporation. All rights reserved. 30137515 Rev. 001 04/06 EBA.DS.CO.AE